

10644 U.S. PTO
11/16/99

09/441380
11/16/99

A

Please type a plus sign (+) inside this box → ☐ +
Approved for use through 09/30/2000 OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</small>	Attorney Docket No.	75622.P0007
	First Inventor or Application Identifier	Hein, Jerrell P.
	Title	Method and Apparatus for Monitoring Subscriber Loop ...
	Express Mail Label No.	EL 349960182 US

APPLICATION ELEMENTS <small>See MPEP chapter 600 concerning utility patent application contents.</small>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) <small>(Submit an original and a duplicate for fee processing)</small>	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages 27] <small>(preferred arrangement set forth below)</small> <ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure	6. Nucleotide and/or Amino Acid Sequence Submission <small>(if applicable, all necessary)</small> <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 7]	ACCOMPANYING APPLICATION PARTS 7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement <input checked="" type="checkbox"/> Power of Attorney <small>(when there is an assignee)</small> 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <small>(Should be specifically itemized)</small> 13. <input checked="" type="checkbox"/> * Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired (PTO/SB/09-12) 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input type="checkbox"/> Other: _____
4. Oath or Declaration [Total Pages 2] <ul style="list-style-type: none">a. <input checked="" type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) <small>(for continuation/divisional with Box 16 completed)</small><ul style="list-style-type: none">i. <input type="checkbox"/> <u>DELETION OF INVENTOR(S)</u> Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	
* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).	


16. If a **CONTINUING APPLICATION**, check appropriate box, and supply the requisite information below and in a preliminary amendment

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____ / _____


Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label  or ☐ Correspondence address below
(Insert Customer No. or Attach bar code label here)

Name	William D. Davis				
Address	Davis & Johnson, L.L.P. P.O. Box 1093, 4503 W Hwy 290				
City	Dripping Springs	State	Texas	Zip Code	78620
Country	USA	Telephone	(916) 364-1270	Fax	(916) 364-1471

Name (Print/Type)	William D. Davis	Registration No. (Attorney/Agent)	38,428
Signature		Date	November 16, 1999

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

**STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))—SMALL BUSINESS CONCERN**

Docket Number (Optional)
75622.P0007

Applicant, Patentee, or Identifier: Hein, Jerrell P.

Application or Patent No.: _____

Filed or Issued: _____

Title: Method and Apparatus for Monitoring Subscriber Loop Interface Circuitry Power Dissipation

I hereby state that I am

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN Silicon Laboratories, Inc.

ADDRESS OF SMALL BUSINESS CONCERN 4635 Boston Lane, Austin, Texas 78735

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

- ☒ no such person, concern, or organization exists.
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING Navdeep S. Sooch

TITLE OF PERSON IF OTHER THAN OWNER President

ADDRESS OF PERSON SIGNING 4635 Boston Lane, Austin, Texas 78735

SIGNATURE Navdeep S. Sooch DATE 11/11/99

Express Mail No: EL 349960182 US

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

UNITED STATES PATENT APPLICATION

FOR

METHOD AND APPARATUS FOR MONITORING SUBSCRIBER LOOP
INTERFACE CIRCUITRY POWER DISSIPATION

INVENTOR:

JERRELL P. HEIN

Prepared by:

DAVIS & JOHNSON, L.L.P.
P.O. BOX 1093
4503 W. HWY 290
DRIPPING SPRINGS, TX 78620
(916) 364-1270

Attorney Docket No. 75622.P0007

EL 349960182 US

"Express Mail" mailing label number

November 16, 1999

Date of Deposit

I hereby certify that I am causing this paper or fee to be deposited with the United States Postal Service "Express Mail Post Office to Addressee" service on the date indicated above and that this paper or fee has been addressed to the Assistant Commissioner for Patents, Washington, D. C. 20231

William D. Davis

(Typed or printed name of person mailing paper or fee)

William D. Davis

(Signature of person mailing paper or fee)

METHOD AND APPARATUS FOR MONITORING SUBSCRIBER LOOP
INTERFACE CIRCUITRY POWER DISSIPATION

FIELD OF THE INVENTION

This invention relates to the field of telecommunications. In particular, this
5 invention is drawn to subscriber loop interface circuitry.

BACKGROUND OF THE INVENTION

Subscriber line interface circuits are typically found in the central office exchange
of a telecommunications network. A subscriber line interface circuit (SLIC) provides a
communications interface between the digital switching network of a central office and an
10 analog subscriber line. The analog subscriber line connects to a subscriber station or
telephone instrument at a location remote from the central office exchange.

The analog subscriber line and subscriber equipment form a subscriber loop. The
interface requirements of an SLIC typically result in the need to provide relatively high
voltages and currents for control signaling with respect to the subscriber equipment on the
15 subscriber loop. Voiceband communications are typically low voltage analog signals on
the subscriber loop. Thus the SLIC must detect and transform low voltage analog signals
into digital data for transmitting communications received from the subscriber equipment
to the digital network. For bi-directional communication, the SLIC must also transform
digital data received from the digital network into low voltage analog signals for
20 transmission on the subscriber loop to the subscriber equipment.

One SLIC design includes discrete passive inductive components such as
transformers for handling the higher voltages and currents. Disadvantages of this design
include the bulkiness, weight, and power consumption of the passive inductive
components.

25 Another SLIC design incorporates multiple specialized integrated circuits to
achieve a transformerless SLIC. Typically one integrated circuit is dedicated to handling

the low voltage digital signaling and another integrated circuit is dedicated to handling the higher powered analog control signaling functions required for the subscriber loop. One disadvantage of this design is that programming of various SLIC operational characteristics is typically accomplished using discrete components such that the SLIC operational characteristics are not dynamically modifiable. In addition, the integrated circuit handling the higher powered analog control signaling functions tends to be relatively expensive.

SUMMARY OF THE INVENTION

In view of limitations of known systems and methods a subscriber line interface circuit is described. The subscriber line interface circuitry includes an integrated circuit having sense inputs for a sensed tip signal and a sensed ring signal of a subscriber loop.

- 5 The integrated circuit generates a subscriber loop linefeed driver control signal in response to the sensed signals. The linefeed driver does not reside with the integrated circuit.

A method for monitoring power dissipation of the linefeed driver components includes the step of sampling at least one of a tip and a ring signal to determine a line voltage and a line current of a linefeed component of the subscriber loop. An
10 instantaneous power dissipation of the linefeed component is estimated. The estimated instantaneous power dissipation is filtered to generate an estimated junction temperature of the linefeed component.

An apparatus for monitoring power dissipation of a selected linefeed component includes an analog-to-digital converter (ADC) for providing a sampled value from at least
15 one of a tip and a ring line. A power calculator calculates an instantaneous power dissipation of the selected linefeed component from the sampled value and control currents provided to a plurality of linefeed driver components. A filter provides an estimated junction temperature of the selected linefeed component from the instantaneous power dissipation.

20 In one embodiment, a subscriber loop interface circuit includes a signal processor with sense inputs for sensing a tip line and a ring line of the subscriber loop. The signal processor generates subscriber loop control signals in response to the sensed inputs. A linefeed driver drives the subscriber loop in accordance with the subscriber loop control signals. The linefeed driver includes a tip fuse series-coupled to a tip resistor and the tip
25 line and a ring fuse series-coupled to a ring resistor and the ring line. Voltages sampled

from each side of the series-coupled tip fuse and resistor collectively form the sensed tip signal. Voltages sampled from each side of the series-coupled ring fuse and resistor collectively form the sensed ring signal.

Another feature is that sensing of the tip and ring lines for subscriber loop control
5 can be accomplished across components including tip or ring inline protective devices
such as fuses such that one lead of a pair of sense leads is unprotected by the fuse and the
other lead is protected by the fuse. This enables using the same sensing circuitry for
power monitoring as well as to determine other line conditions such as whether the fuses
are blown without the use of separate sensing circuitry dedicated to that purpose. This
10 approach reduces the number of pins on an integrated circuit needed to monitor power
dissipation and determine pre-fuse line conditions.

Other features and advantages of the present invention will be apparent from the
accompanying drawings and from the detailed description that follows.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example and not limitation in the figures of the accompanying drawings, in which like references indicate similar elements and in which:

5 Figure 1 illustrates one embodiment of a central office exchange including a subscriber line interface circuit (SLIC) coupling subscriber equipment to a digital switching system.

 Figure 2 illustrates a block diagram of an SLIC including a signal processor and a linefeed driver.

10 Figure 3 illustrates one embodiment of an SLIC linefeed driver.

 Figure 4 illustrates a block diagram of an alternative embodiment of the SLIC.

 Figure 5 illustrates power monitoring circuitry within the signal processor.

 Figure 6 illustrates a method for monitoring power dissipation of a selected linefeed driver component.

15 Figure 7 illustrates one embodiment of the subscriber line interface circuit wherein at least one of each of the tip and ring sense lines is coupled to the unprotected side of a fused subscriber loop circuit.

DETAILED DESCRIPTION

Figure 1 illustrates functional elements of one embodiment of a subscriber line interface circuit (SLIC) 110 typically associated with plain old telephone services (POTS) telephone lines. The subscriber line interface circuit (SLIC) provides an interface between
5 a digital switching network 120 of a local telephone company central exchange and a subscriber loop 132 including subscriber equipment 130.

The subscriber loop 132 is typically used for communicating analog data signals (e.g., voiceband communications) as well as subscriber loop "handshaking" or control signals. The analog data signals are typically on the order of 1 volt peak-to-peak (i.e.,
10 "small signal"). The subscriber loop control signals typically consist of a 48 V d.c. offset and an a.c. signal of 40-140 Vrms (i.e., "large signal"). The subscriber loop state is often specified in terms of the tip 180 and ring 190 portions of the subscriber loop.

The SLIC is expected to perform a number of functions often collectively referred to as the BORSCHT requirements. BORSCHT is an acronym for "battery feed,"
15 "overvoltage protection," "ring," "supervision," "codec," "hybrid," and "test."

The SLIC provides power to the subscriber equipment 180 using the battery feed function. The overvoltage protection function serves to protect the central office circuitry against voltage transients that may occur on the subscriber loop 132. The ring function enables the SLIC to signal the subscriber equipment 180. In one embodiment,
20 subscriber equipment 180 is a telephone. Thus, the ring function enables the SLIC to ring the telephone.

The supervision function enables the SLIC to detect service requests such as when the caller goes off-hook. The supervision function is also used to supervise calls in progress and to detect dialing input signals.

The hybrid function provides a conversion from two wire signaling to four wire signaling. The SLIC includes a codec to convert the four-wire analog voiceband data signal into serial digital codes suitable for transmission by the digital switching network 120. In one embodiment, pulse code modulation is used to encode the voiceband data. The SLIC
5 also typically provides a means to test for or to indicate faults that may exist in the subscriber loop or the SLIC itself.

The codec function has relatively low power requirements and can be implemented in a low voltage integrated circuit operating in the range of approximately 5
10 volts or less. The battery feed and supervision circuitry typically operate in the range of 40-75 volts. In some implementations the ringing function is handled by the same circuitry as the battery feed and supervision circuitry. In other implementations, the ringing function is performed by higher voltage ringing circuitry (75 - 150 V_{rms}). Thus depending upon implementation, the ringing function as well as the overvoltage protection
15 function may be associated with circuitry having greater voltage or current operating requirements than the other circuitry.

Recent transformerless SLIC designs tend to distribute the functional requirements between two integrated circuits based on whether the functions are traditionally associated with the high voltage subscriber loop controls or the low voltage data processing. For example, in one embodiment, the codec is implemented in a low voltage
20 integrated circuit and the remaining functions (e.g., supervision) are implemented primarily in a high voltage integrated circuit such as a bipolar integrated circuit. Although this design tends to offer considerable space, weight, and power efficiencies over designs requiring passive inductive components, this distribution of the functional requirements tends to result in a relatively expensive high voltage integrated circuit.

Figure 2 illustrates one embodiment of an SLIC 200 wherein the BORSCHT functions have been redistributed between a signal processor 210 and a linefeed driver 220. Signal processor 210 is responsible for at least the ring control, supervision, codec, and hybrid functions. Signal processor 210 controls and interprets the large signal subscriber loop control signals as well as handling the small signal analog voiceband data and the digital voiceband data.

In one embodiment, signal processor 210 is an integrated circuit. The integrated circuit includes sense inputs for a sensed tip and ring signal of the subscriber loop. The integrated circuit generates subscriber loop linefeed driver control signal in response to the sensed signals. In one embodiment, the linefeed driver does not reside within the integrated circuit or within the same integrated circuit package as the signal processor 210.

Signal processor 210 receives subscriber loop state information from linefeed driver 220 as indicated by tip/ring sense 222. This information is used to generate control signals for linefeed driver 220 as indicated by linefeed driver control 212. The voiceband 230 signal is used for bi-directional communication of the analog voiceband data between linefeed driver 220 and signal processor 210.

Signal processor 210 includes a digital interface for communicating digitized voiceband data to the digital switching network using digital voiceband 216. In one embodiment, the digital interface includes a processor interface 214 to enable programmatic control of the signal processor 210. The processor interface effectively enables programmatic or dynamic control of battery control, battery feed state control, voiceband data amplification and level shifting, longitudinal balance, ringing currents, and other subscriber loop control parameters as well as setting thresholds such as a ring trip detection thresholds and an off-hook detection threshold.

03413601169

The digital voiceband data 214 is coupled to a digital codec interface of signal processor 210 for bi-directional communication of the digital voiceband data between the codec of the signal processor and the digital switching network. The analog voiceband data 230 is coupled to an analog codec interface of signal processor 210 for bi-directional communication of the analog voiceband data between the codec and the linefeed driver.

Linefeed driver 220 maintains responsibility for battery feed to tip 280 and ring 290. Overvoltage protection is not explicitly illustrated, however, overvoltage protection can be provided by fuses incorporated into linefeed driver 220, if desired. Linefeed driver 220 includes sense circuitry to provide signal processor 210 with pre-determined sensed subscriber loop operating parameters as indicated by tip/ring sense 222. Signal processor 210 performs any necessary processing on the sensed parameters in order to determine the operational state of the subscriber loop. For example, differences or sums of sensed voltages and currents are performed as necessary by signal processor 210 rather than linefeed driver 220. Thus common mode and differential mode components (e.g., voltage and current) of the subscriber loop are calculated by the signal processor rather than the linefeed driver.

Linefeed driver 220 modifies the large signal tip and ring operating conditions in response to linefeed driver control 212 provided by signal processor 210. This arrangement enables the signal processor to perform processing as needed to handle the majority of the BORSCHT functions. For example, the supervisory functions of ring trip, ground key, and off-hook detection can be determined by signal processor 210 based on operating parameters provided by tip/ring sense 222.

Figure 3 illustrates one embodiment of an SLIC linefeed driver 300. In one embodiment, the linefeed driver 300 is implemented as a number of discrete components.

Linefeed driver 300 includes a voiceband circuitry 320, sensing circuitry 330, and power circuitry 340.

Voiceband circuitry 320 enables data signals corresponding to voiceband communications to be retrieved from or impressed onto the subscriber loop. Capacitors CR and CT effectively provide a.c. coupling for the analog voiceband data from the subscriber loop to the signal processor while decoupling signal processor 210 from the d.c. offsets of the tip 380 and ring 390 nodes. Thus capacitors CR and CT effectively provide d.c. isolation of the analog voiceband data interface formed by nodes 322-328 from the subscriber loop. In the embodiment illustrated, voiceband circuitry 320 provides a.c. coupling of the analog voiceband data between the subscriber loop and the signal processor using only passive components.

Voiceband communication is bi-directional between the subscriber loop and signal processor 210. Nodes 324 and 328 serve to communicate voiceband data from the subscriber loop to signal processor 210 (i.e., tip and ring "audio in"). Nodes 322 and 326 provide a means of impressing a signal on the subscriber loop from signal processor 210 (i.e., tip and ring "audio out"). In one embodiment RTT and RTR collectively establish a 600 Ω termination impedance.

Sensing circuitry 330 enables signal processor 210 to determine the tip 380 and ring 390 node voltages as well as the subscriber loop current using sensing resistors RS1, RS2, RS3, and RS4. Resistors RT and RR are used to generate a voltage drop for determining the tip and ring currents. In one embodiment, sensing circuitry 330 consists only of passive discrete components.

Referring to Figure 2, tip/ring sense 222 includes a sensed tip signal and a sensed ring signal. In one embodiment, the sensed tip signal includes first and second sampled tip voltages. Resistors RS1 and RS2 are used to sample the tip line voltage at each end of

RT. Resistors RS1 and RS2 convert the sampled tip line voltages to currents suitable for handling by signal processor 210 at nodes 332 and 334. The difference between the first and second sampled tip voltages is proportional to the tip current. Likewise, the sensed ring signal includes first and second sampled ring voltages. Resistors RS3 and RS4
5 similarly convert sampled ring line voltages at both ends of RR to currents suitable for handling by signal processor 210 at nodes 336 and 338. The difference between the first and second sampled ring voltages is proportional to the ring current. These calculations, however, can be performed as necessary by the signal processor 210 rather than the linefeed driver 220 circuitry. In addition, these sensed parameters enable the signal
10 processor 210 to determine the subscriber loop voltage and the subscriber loop common mode and differential mode currents.

Power circuitry 340 provides the battery feed and other relatively high voltage functions to the subscriber loop in accordance with analog linefeed control signals provided by the signal processor 210 at nodes 342, 344, 346, and 348. Processing of the
15 sensed parameters of the tip and ring lines for generating the linefeed control signals is handled exclusively by signal processor 210.

The subscriber loop current and the tip and ring voltages are controlled by transistors Q1-Q6. In one embodiment, Q1-Q4 are PNP bipolar junction transistors and Q5-Q6 are NPN bipolar junction transistors. Given that the base terminals of Q1-Q4 are
20 coupled to ground, nodes 342-348 need only be approximately 0.7 volts to turn on transistors Q1-Q4. Due to the small voltage drop between the base and emitters of Q1-Q4, control of the linefeed circuitry requires relatively low power and thus linefeed driver control currents I1-I4 may be provided by a signal processor 210 implemented as a low voltage complementary metal oxide semiconductor (CMOS) integrated circuit.

Transistors Q1, Q4, and Q6 (and resistor R2) control the tip voltage 380. The tip voltage is increased by the application of control current I1 to Q1. The tip voltage (node 380) is decreased by the application of control current I4 to Q4. Thus control currents I1 and I4 effectively provide a tip control signal for manipulating the tip voltage at node 380.

5 Similarly, transistors Q2, Q3, and Q5 (and resistor R1) control the ring voltage 390. The application of control current I3 to Q3 increases the ring voltage. The ring voltage is decreased by the application of control current I2 to Q2. Control currents I2 and I3 effectively provide a ring control signal for manipulating the ring voltage at node 390.

10 Control currents I1-I4 thus effectively control the large signal subscriber loop current and tip and ring voltages. For example, the ringing signal can be generated by using the control signals at nodes 342-348 to periodically reverse the polarity of tip 380 with respect to ring 390 (i.e., battery polarity reversal) at the nominal ringing frequency.

Sensing portion 330 enables signal processor 210 to determine the large signal
15 state of the subscriber loop without the need for intervening active circuitry or level shifters. In one embodiment, sensing portion 330 comprises only passive discrete components. The linefeed control inputs 342-348 enable signal processor 210 to actively manage the large signal state of the subscriber loop. In particular, the large signal a.c. and d.c. components of the subscriber loop control protocol can now be controlled directly by
20 a low voltage integrated circuit. The large signal a.c. and d.c. control loops are effectively terminated at the signal processor 210.

In other words, the large signal a.c. and d.c. control loops are terminated at the low voltage integrated circuit. Thus signal processing and state determination such as off-hook, ring trip, and ring control formerly associated with high power analog circuitry can
25 be handled predominately by a low voltage integrated circuit. In addition, the integrated

circuit signal processor can handle processing of the small signal analog voiceband data from the subscriber loop without the need for intervening active elements or level shifting circuitry.

Figure 4 illustrates a block diagram of an alternative embodiment of an SLIC.

5 Comparing Figure 4 with Figure 2, the primary difference is that a portion of the voiceband communication function (230) is handled by the same signal lines handling the linefeed driver control (212). In particular, signal lines 412 combine the linefeed driver control function with transmission of voiceband communications from the signal processor 410 to the linefeed driver 420 (i.e., audio out) for communication to the
10 subscriber equipment.

Referring to Figure 3, this is accomplished in one embodiment by superimposing the a.c. voiceband communications on the control currents I1 and I4. The bi-directional voiceband data interface includes nodes 324, 328, 342, and 348. Accordingly resistors RTT and RTR are eliminated in this configuration thus reducing the number of discrete
15 components. Another advantage of this configuration is that the termination impedance previously determined by the values of RTT and RTR can now be set by controlling currents I1-I4. The use of a programmable signal processor 410 effectively places the value of the termination impedance formerly determined by RTT and RTR under programmatic control.

20 In one embodiment, line drive transistors Q1-Q6 are monitored to ensure that the actual line current and voltages do not result in values that exceed the power dissipation ratings of these components. In one embodiment, the monitoring is performed by the signal processor.

Figure 5 illustrates a signal processor 510 including components for monitoring the
25 linefeed drive components Q1-Q6. Analog-to-digital converter (ADC) 520 generates

digital values corresponding to the sensed tip and ring node voltages provided by tip/ring sense circuitry 592. In one embodiment, the tip/ring sense circuitry provides TIP1, TIP1-TIP2, RING1, and RING1-RING2 to ADC 520. Referring to Figure 3, TIP1 is coupled to node 332 and internally to TIP1-TIP2, node 334 is coupled to TIP1-TIP2, RING1 is coupled to node 336 and internally to RING1-RING2, and node 338 is coupled to RING1-RING2. The differential signals can easily be determined through the use of a differential amplifier. The differential signals are proportional to the tip and ring line currents. These values are particularly useful for analog control of the subscriber loop. In an alternative embodiment, the differences are calculated by the power calculator 540 when determining instantaneous power dissipation (as illustrated in Figure 7).

Referring to Figures 3 and 5, the linefeed control outputs I1-I4 are provided by control outputs 580. These currents are also sampled by ADC 520. In one embodiment, V_{BAT} is also sampled by ADC 520. Alternatively, V_{BAT} may be assumed to have a pre-determined value. The digital representation of sampled values corresponding to TIP1, TIP1-TIP2, RING1, RING1-RING2, I1, I2, I3, I4, and V_{BAT} are stored in storage registers 530.

In one embodiment, instantaneous power dissipation for Q1-Q6 is calculated as $V_{CE} \cdot I_C$. The values stored in registers 530 can then be used by power calculator 540 to determine instantaneous power dissipation for each of Q1-Q6. In one embodiment, power calculator 540 includes a multiplier.

The collector voltages (i.e., V_{CQ1} , V_{CQ2}) are known because the voltage at node 362 (i.e., V_{362}) can readily be determined by the tip sense circuitry. Similarly, V_{CQ3} and V_{CQ5} are known because the voltage at node 366 can readily be determined by the ring sense circuitry. V_{BE} for each of transistors Q1-Q6 is approximately 0.7 V or -0.7 V depending upon transistor type. V_{BAT} is either sensed or pre-determined.

With respect to Q1, V_{CE} can readily be calculated from the known collector voltage (V_{CQ1}) and base-emitter junction voltage. Thus the instantaneous power dissipation (p_{Q1}) can be calculated from V_{CEQ1} and I_1 . Similarly, for Q3 V_{CEQ3} can readily be calculated from the known collector voltage (V_{CQ3}) and base-emitter junction voltage. Q3 instantaneous power dissipation can then be calculated from I_3 and V_{CE} of Q3. The instantaneous power dissipation for Q1 and Q3 are calculated as follows:

$$p_{Q1} = I_1 \cdot (+0.7 - V_{362})$$

$$p_{Q3} = I_3 \cdot (+0.7 - V_{366})$$

The V_{BE} for Q5 and Q6 is approximately 0.7 V. Thus the voltage drop across resistors R1 and R2 is also 0.7 V. This information in conjunction with the value of V_{BAT} enables determination of the collector voltages V_{CQ2} and V_{CQ4} . Given the base of transistors Q2 and Q4 are coupled to signal ground, V_{CQ2} and V_{CQ4} also represent the collector-to-base junction voltages for their respective transistors. The V_{BE} for these transistors is approximately -0.7 V, thus enabling a determination of V_{CE} for transistors Q2 and Q4. Thus instantaneous power dissipation for Q2 and Q4 can be determined from I_2 , I_4 and the V_{CE} for the respective transistors as follows:

$$p_{Q2} = I_2 \cdot (-V_{BAT} + 0.7 + -0.7V) = -I_2 \cdot V_{BAT}$$

$$p_{Q4} = I_4 \cdot (-V_{BAT} + 0.7 + -0.7V) = -I_4 \cdot V_{BAT}$$

The voltages at nodes 360, 362, 364, and 366 are known as a result of sampling at nodes 332, 334, 336, and 338. With respect to Q6, the tip current through R_T (i.e., I_{RT}) is determined as $I_{RT} = \frac{V_{360} - V_{362}}{R_T}$. The base currents of Q1-Q4 are negligible during

normal operation of Q1-Q4 such that the collector current (I_C) is approximated as the emitter current (I_E) for purposes of estimating power dissipation. Thus, for example, $I_{CQ1} \approx I_{EQ1} = I_1$. The collector current for Q6 can then be determined from I_1 and the

tip current I_{RT} . V_{CEQ6} is known from the voltage sampled at node 362 and V_{BAT} .

Thus the instantaneous power dissipation of Q6 is calculated as follows:

$$p_{Q6} = (V_{362} - V_{BAT}) \cdot (I_1 + I_{RT})$$

With respect to Q5, the ring current through RR (i.e., I_{RR}) is determined as

5
$$I_{RR} = \frac{V_{364} - V_{366}}{RR}. V_{CEQ5} \text{ is known from the voltage sampled at node 366 and}$$

V_{BAT} . The collector current for Q5 is determined from I_3 and the ring current I_{RR} .

Thus the instantaneous power dissipation of Q5 can be calculated as follows:

$$p_{Q5} = (V_{366} - V_{BAT}) \cdot (I_3 + I_{RR})$$

10 The calculated instantaneous power value for the selected component is then filtered by a digital filter 550 to provide an estimated transistor junction temperature signal 552. In one embodiment, filter 550 includes a re-writable nonvolatile memory to permit programming the filter with filter parameters specific to the thermal characteristics of different linefeed transistors. Thus filter 550 can be programmed to handle transistors with different thermal characteristics as the need arises. In one embodiment, the filter 550
15 is a low pass filter. Comparator 560 provides a thermal alarm indicator 564, if the estimated junction temperature signal 552 exceeds a pre-determined junction temperature corresponding to alarm threshold 562.

The monitoring function implemented within the signal processor 510 can be achieved using low voltage, fineline, low cost circuitry. In one embodiment, the
20 monitoring is performed on a time-shared basis such that only one ADC 520, power calculator 540, and digital filter 550 are needed to monitor all the linefeed driver transistors as illustrated in Figure 5. This can be accomplished, for example, through the use of multiplexer 570 with a time-based multiplexer control 572. This significantly reduces the die size that would otherwise be needed for dedicated, continuous, non-
25 clocked monitoring of each linefeed transistor or each node 360-364. In addition, ADC

520 may be implemented as a low speed ADC given that thermal events tend to occur slowly. For example, in one embodiment, ADC 520 is a six bit converter with a sampling rate of a few hundred Hertz.

Figure 6 illustrates a method of applying the monitoring function to a selected transistor. In step 610, the line voltage and line current associated with a selected transistor are determined. The instantaneous power dissipation is calculated in step 620. In step 630, the instantaneous power is filtered to generate an estimated junction temperature for the selected linefeed transistor. The filter is pre-programmed with the appropriate filter parameters corresponding to thermal characteristics particular to the linefeed components. Step 640 determines whether the estimated junction temperature exceeds a pre-determined threshold value. If so, then a thermal alarm is provided in step 650. Otherwise the method is completed in step 690.

Another advantage of implementing the monitoring function in the low voltage device as indicated in Figure 5 is that the digital representation of the line voltages and line currents stored in registers 530 are available for more sophisticated diagnosis of the type of fault condition. These values are also useful for detecting events such as parallel offhook terminal devices as well as for testing the board level of the integrity of the signal processor, the discrete components of the linefeed driver circuitry, and board routing. Yet another advantage is that the digital filter time constant and alarm threshold can be fully programmable.

Subscriber loop interface circuitry is typically used in conjunction with fuses and overvoltage protection in order to ensure that voltages impressed upon the tip and ring lines do not destroy or otherwise create an electrical or fire hazard for the subscriber loop interface circuitry. In overvoltage conditions such as a power cross condition, signals as large as 600 V with high current sourcing capability may exist on tip and ring. Protective

devices such as fuses are designed to "blow open" in order to avoid damage to the subscriber loop interface circuit 770 and to reduce the risk of fire. All circuitry that cannot withstand 600 V must reside behind the protective fuses.

This creates difficulties during board level testing if the line monitoring sense points are observing the TIP and RING line voltages behind the fuses (i.e., protected by the fuses). In such a case, condition of the tip or ring lines may not be readily determinable if a fuse is missing, blown, or improperly seated. Without knowledge of the condition of the fuse, further testing may not adequately indicate whether a problem is with the fuse or somewhere else in the subscriber loop.

One method of verifying the fuse status entails attaching an external load and monitoring the current while driving a voltage signal on the line to determine if the fuse is installed. Alternatively, additional dedicated leads may be used for the sole purpose of measuring the unprotected tip and ring signals. The first solution involves additional manual steps. The second method tends to undesirably increase the number of pins required to implement such functionality on the signal processor.

The use of the external discrete components as opposed to a high voltage integrated circuit for the linefeed driver enables more extensive testing for diagnostic purposes. External discrete components (e.g., resistors) significantly attenuate the line voltages provided to the signal processor. This attenuation protects the signal processor from large voltages on the line. In particular, the attenuation protects the signal processor from voltage conditions that a high voltage integrated circuit driving the line directly would not be able to tolerate. This enables placement of at least a portion of each of the tip and ring sense circuits on the unprotected side of any tip and ring line fuses. Thus in one embodiment, the low voltage signal processor is able to diagnose other conditions such as whether a fuse is blown without the need for any additional pins.

Figure 7 illustrates subscriber loop interface circuitry including protective devices such as fuses 782, 792 and overvoltage protection 730. In overvoltage conditions such as a power cross condition, signals as large as 600 V with high current sourcing capability may exist on TIP 780 and RING 790. Protective devices such as fuses 782 and 792 are designed to "blow open" in order to avoid damage to the subscriber loop interface circuit 770 and to reduce the risk of fire. All circuitry that cannot withstand 600 V must reside behind the protective fuses 782 and 792.

Signal processor 710 includes TIP/RING sense circuitry 770 with dedicated sense circuitry for each sensed node. One embodiment of the sense circuitry 772 is illustrated for TIP1. For the TIP1 772 sense circuitry illustrated, a 400 K Ω sense resistor (i.e., RS1) exposed to a 600 V tip voltage would generate a sense current, I_{SENSE} of 1.5 mA. Such a current level is well within the tolerance of the low voltage integrated circuit signal processor 710. In contrast, however, a typical high voltage integrated circuit has a maximum voltage rating less than 150 V. Thus a high voltage integrated circuit driving the lines directly would be destroyed in the event of a 600 V tip voltage.

As a result of the attenuation, the low voltage signal processor can sense the tip and ring lines *across* the series-coupled inline components including the typical protection resistors or fuses 782 and 792 such that for a pair of sense lines, one of the pair is not protected by the fuse and the other is electrically protected by the fuse. Thus instead of sampling TIP at nodes 762 and 763, one of the tip sense lines can be moved across to the unprotected side of fuse 782 at node 760 as indicated by the dotted line at node 763. Similarly, instead of sampling RING at nodes 765 and 766, one of the ring sense lines can be moved to the unprotected side of fuse 792 at node 764 as indicated by the dotted line at node 765. Thus tip sensing can be accomplished across series-coupled

tip fuse 782 and tip resistor RT. Similarly, ring sensing can be accomplished across series-coupled ring fuse 792 and ring resistor RR.

Due to the ability to accommodate large subscriber loop voltages, the functions of tip and ring sense can be combined with the monitoring of the line before the fuses to enable determining the status of the line or fuses without any additional pins for signal processor 710. If one of the tip sense leads (732) is coupled to TIP 780 at node 760 in front of fuse 782, the tip line voltage can be directly monitored. Similarly if one of the ring sense leads (736) is coupled to RING 790 at node 764 in front of fuse 792, the ring line voltage can be directly monitored.

With direct (before the fuse) monitoring of the tip and ring lines, the line voltage can be directly monitored in a no-load condition to determine if the fuses 782 and 792 have been properly installed. In addition, if the fuses blow in the field, the line voltages can still be directly monitored to determine if the power cross condition still exists or if it has been removed, thus providing additional diagnostic capabilities over current solutions. For an integrated circuit signal processor, this avoids the introduction of extra pins or pins dedicated to monitoring line conditions on the unprotected side of the fuses. This effectively eliminates two pins from the signal processor integrated circuit package such that only four pins are needed to accomplish tip sensing,, ring sensing, and direct line monitoring.

Thus the signal processor integrated circuit package has a first pair of pins for sensing a tip line voltage and a second pair of pins for sensing a ring line voltage, wherein at least one of the first pair of pins is coupled to an unprotected side of a tip fuse, wherein at least one of the second pair of pins is coupled to an unprotected side of a ring fuse. Two of the pins sense line conditions before the fuses such that no more than four

pins are needed for determining tip and ring line conditions before and after the fuses as well as calculating line voltages and line currents of the linefeed component.

In the preceding detailed description, the invention is described with reference to specific exemplary embodiments thereof. Various modifications and changes may be made thereto without departing from the broader spirit and scope of the invention as set forth in the claims. The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense.

5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

CLAIMS

What is claimed is:

- 1 1. A method comprising the steps of:
 - 2 a) sampling at least one of a tip and a ring signal to determine a line voltage
 - 3 and a line current of a linefeed component of a subscriber loop;
 - 4 b) estimating an instantaneous power dissipation of the linefeed component;
 - 5 c) filtering the estimated instantaneous power dissipation to generate an
 - 6 estimated junction temperature.
- 1 2. The method of claim 1 further comprising the step of:
 - 2 d) generating a thermal alarm, if the estimated junction temperature exceeds an
 - 3 alarm threshold.
- 1 3. The method of claim 2, further comprising the step of:
 - 2 e) timesharing a same monitoring circuitry to perform steps a)-d) for each
 - 3 linefeed driver component being monitored.
- 1 4. The method of claim 1 further comprising the step of:
 - 2 d) programming a filter with filtering parameters corresponding to thermal
 - 3 characteristics of the linefeed component.
- 1 5. A method comprising the steps of:
 - 2 a) selecting a selected linefeed component of a plurality of linefeed
 - 3 components coupled to a subscriber loop having a tip signal and ring signal;

- 4 b) sampling at least one of the tip and the ring signals to determine a voltage
5 and a current associated with the selected linefeed component;
6 c) estimating an instantaneous power dissipation of the selected linefeed
7 component; and
8 d) filtering the estimated instantaneous power dissipation to generate an
9 estimated junction temperature of the selected linefeed component.

- 1 6. The method of claim 5 further comprising the step of
2 e) providing a thermal alarm indicator, if the estimated junction temperature
3 exceeds an alarm threshold.

- 1 7. A subscriber loop signal processor apparatus, comprising:
2 an analog-to-digital converter (ADC) for sampling at least one of a tip and a ring
3 signal;
4 a power calculator coupled to calculate an instantaneous power dissipation of a
5 selected linefeed driver component from the sampled signal and control currents provided
6 to a plurality of linefeed driver components; and
7 a filter providing an estimated junction temperature of the selected linefeed driver
8 component from the instantaneous power dissipation.

- 1 8. The apparatus of claim 7 further comprising:
2 a comparator providing an alarm indicator if the estimated junction temperature
3 exceeds an alarm threshold.

1 9. The apparatus of claim 7 further comprising:
 2 a multiplexer coupling the at least one tip and ring signal to the analog-to-digital
 3 converter to enable providing an estimated junction temperature of any of the linefeed
 4 components using a same ADC, power calculator, and filter.

1 10. The apparatus of claim 9 wherein a multiplexer control is time based to enable
 2 time-sharing the same ADC, power calculator, and filter for each linefeed component.

1 11. The apparatus of claim 7 wherein the ADC, the power calculator, and the filter
 2 reside within a same integrated circuit package.

1 12. The apparatus of claim 7 further comprising:
 2 a re-writable nonvolatile memory coupled to provide filter parameters
 3 corresponding to thermal characteristics of the linefeed components to the filter.

1 13. A subscriber loop interface circuit apparatus comprising:
 2 a signal processor having sense inputs for sensing a tip line and a ring line of a
 3 subscriber loop, the signal processor generating subscriber loop control signals; and
 4 a linefeed driver for driving the subscriber loop in accordance with the subscriber
 5 loop control signals, the linefeed driver including a tip fuse series-coupled to the tip line
 6 and a ring fuse series-coupled to the ring line, wherein the sensed tip signal includes first
 7 and second sampled tip voltages sampled from opposing sides of the tip fuse, wherein the
 8 sensed ring signal includes first and second sampled ring voltages sampled from opposing
 9 ends of the ring fuse.

1 14. The subscriber loop linefeed driver of claim 13 wherein a difference between the
2 first and second sampled tip voltages is proportional to the tip current, wherein a
3 difference between the first and second sampled ring voltages is proportional to the ring
4 current.

1 15. A method comprising the steps of:
2 generating subscriber loop control signals in response to a sensed tip signal and a
3 sensed ring signal of a subscriber loop, wherein the tip signal is sensed before and after a
4 tip fuse, wherein the ring signal is sensed before and after a ring fuse; and
5 driving the subscriber loop in accordance with the subscriber loop control signals.

1 16. A subscriber loop interface circuit apparatus comprising:
2 a signal processor having sense inputs for sensing a tip line and a ring line of a
3 subscriber loop, the signal processor generating subscriber loop control signals; and
4 a linefeed driver for driving the subscriber loop in accordance with the subscriber
5 loop control signals, the linefeed driver including a tip fuse series-coupled to the tip line
6 and a ring fuse series-coupled to the ring line, wherein the tip line and ring line are each
7 sensed at two locations to determine both a status of each fuse and a power dissipation of
8 each linefeed driver component.

ABSTRACT OF THE DISCLOSURE

Subscriber line interface circuitry includes an integrated circuit having sense inputs for a sensed tip signal and a sensed ring signal of a subscriber loop. The integrated circuit generates a subscriber loop linefeed driver control signal in response to the sensed signals.

- 5 The linefeed driver does not reside with the integrated circuit. A method for monitoring power dissipation of the linefeed driver components includes the step of sampling at least one of the tip and ring signals to determine a line voltage and a line current of a selected linefeed driver component. Instantaneous power dissipation of the linefeed component is estimated and then filtered to generate an estimated junction temperature of the linefeed
- 10 component. In one embodiment, the linefeed driver includes a tip fuse series-coupled to the tip line and a ring fuse series-coupled to the ring line. Voltages sampled from each side of the series-coupled tip fuse resistor and the series-coupled ring fuse and resistors collectively form the sensed tip signal and sensed ring signal, respectively. This enables using the same sensing circuitry for power monitoring as well as to determine other line
- 15 conditions such as whether the fuses are blown without the use of separate sensing circuitry dedicated to that purpose. This approach reduces the number of pins on an integrated circuit needed to monitor power dissipation and determine pre-fuse line conditions.

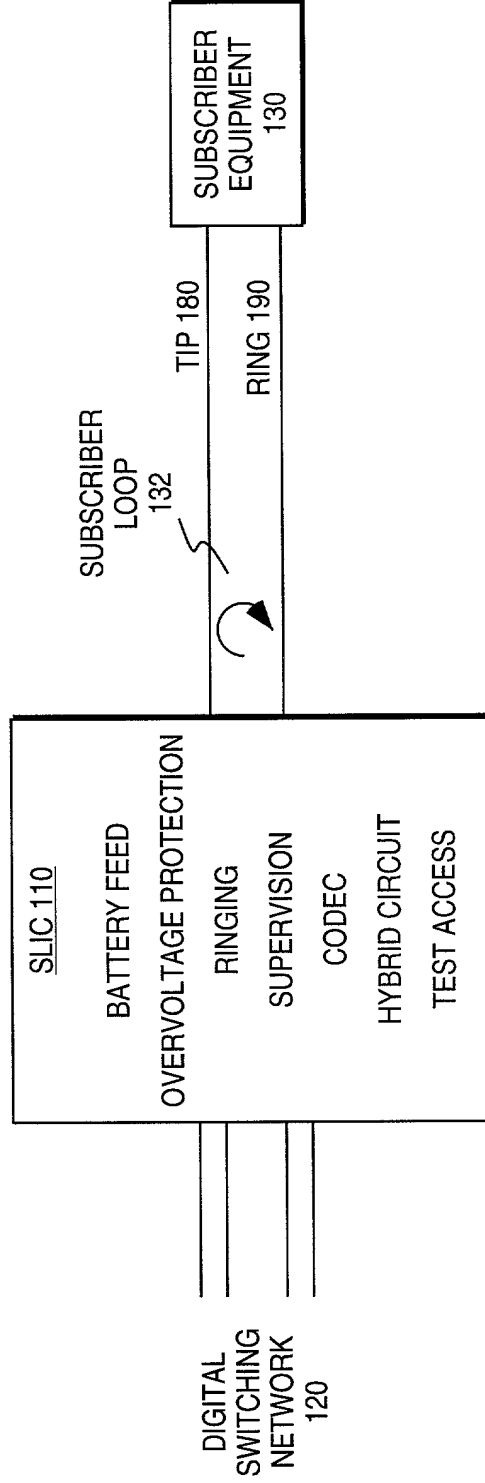


FIG. 1

200

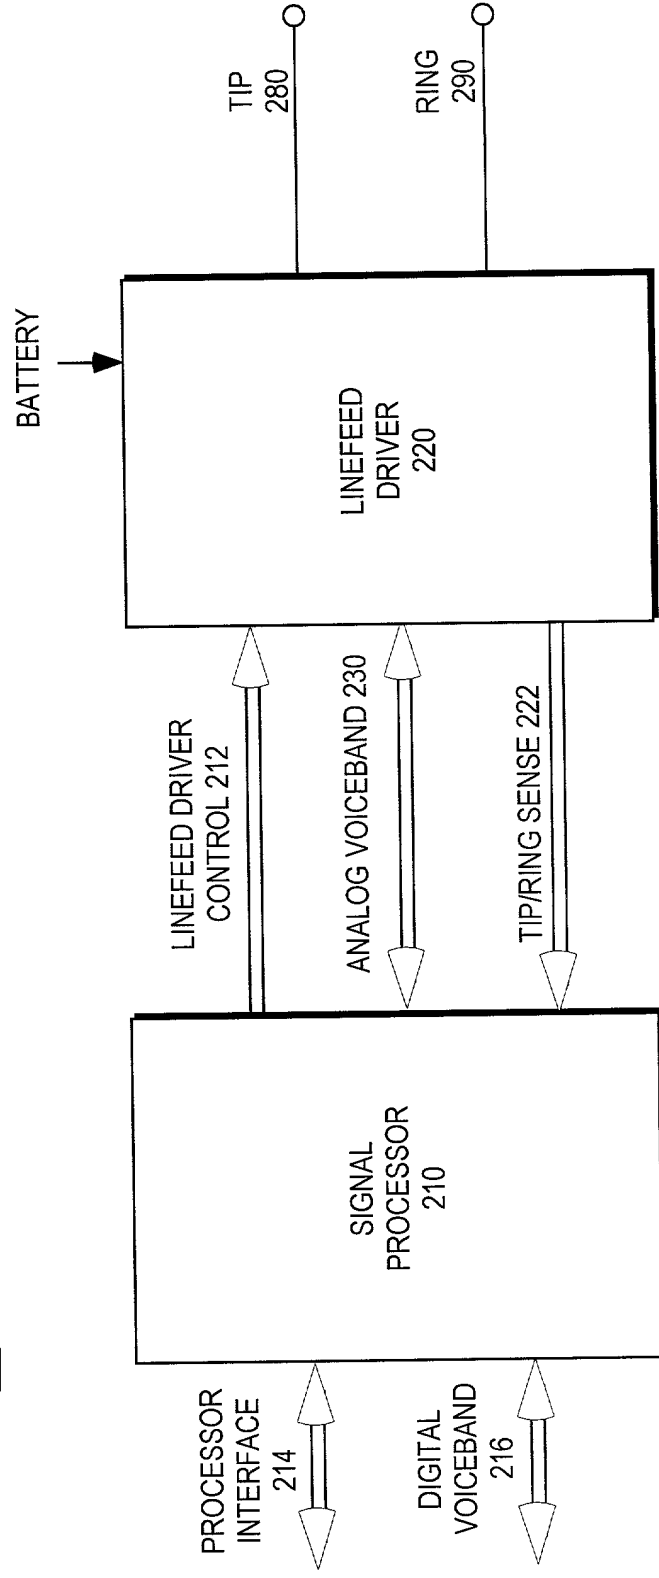


FIG. 2

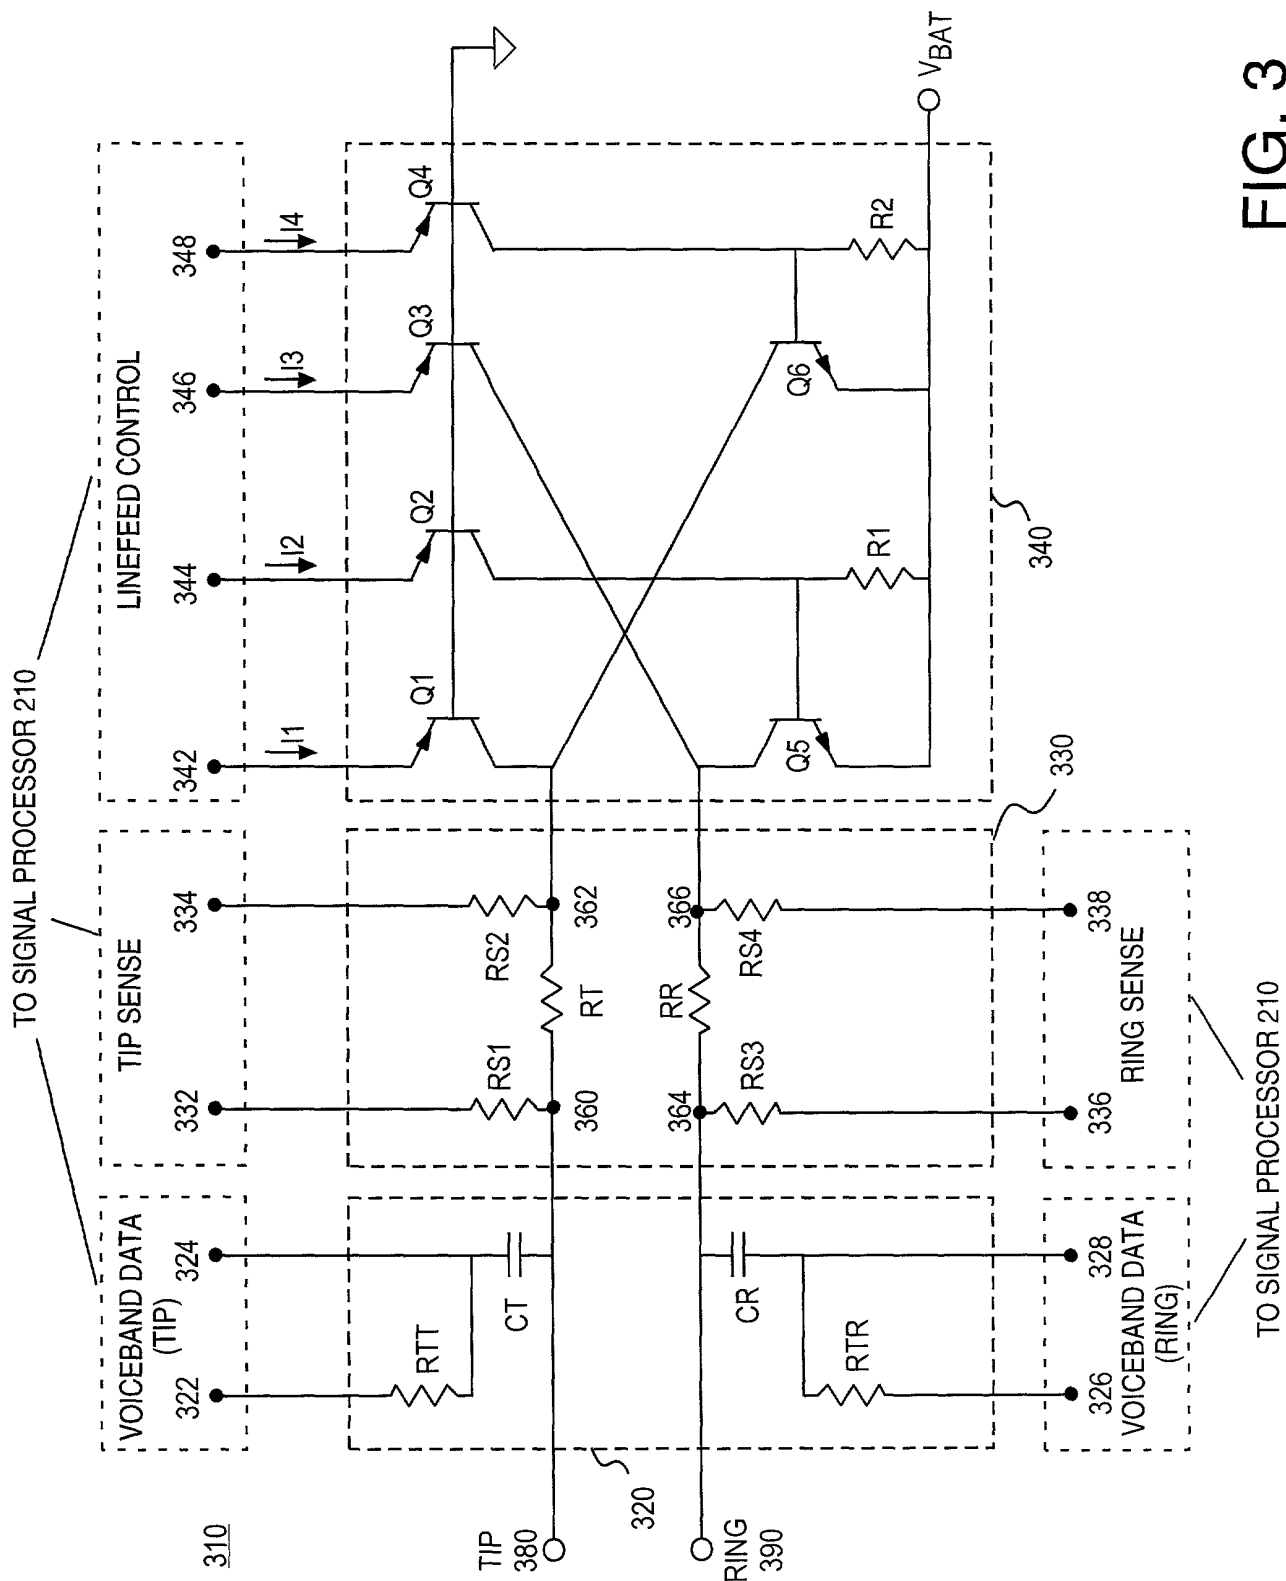


FIG. 3

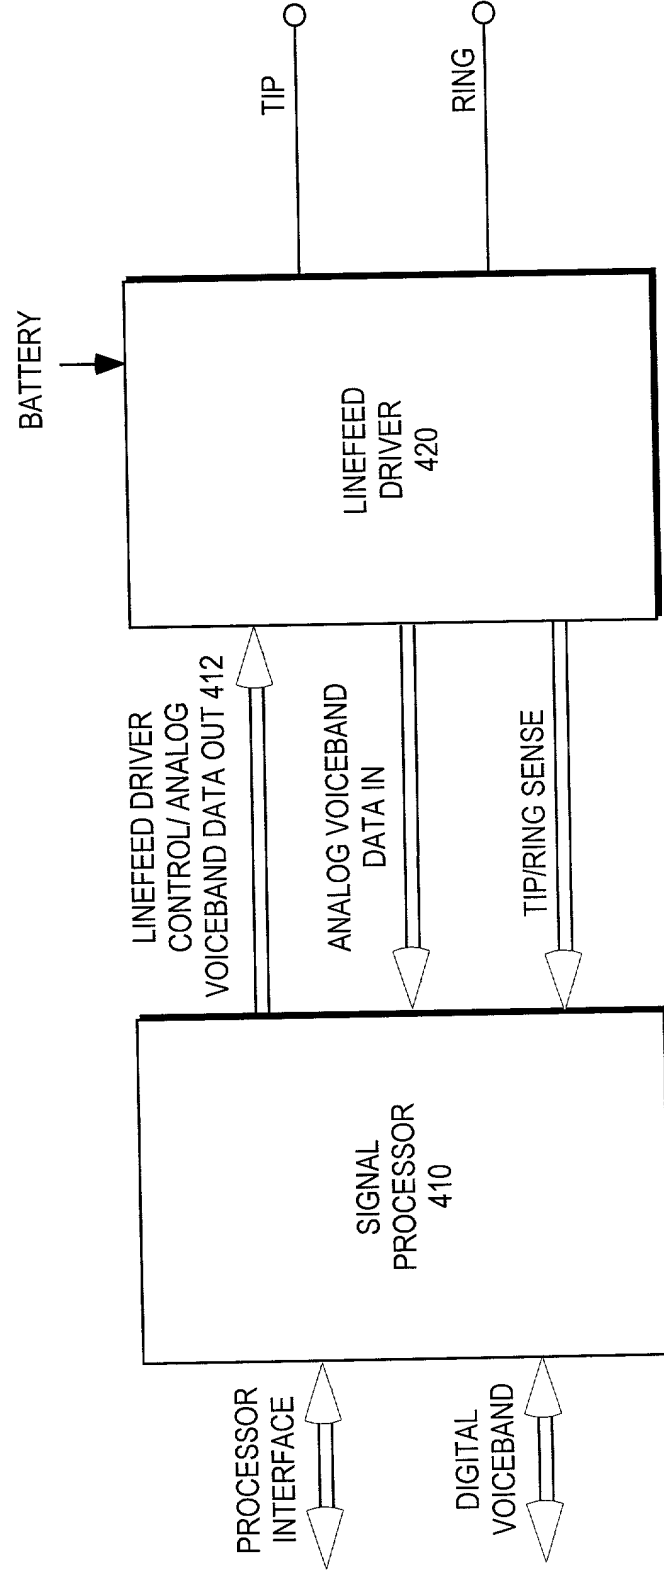


FIG. 4

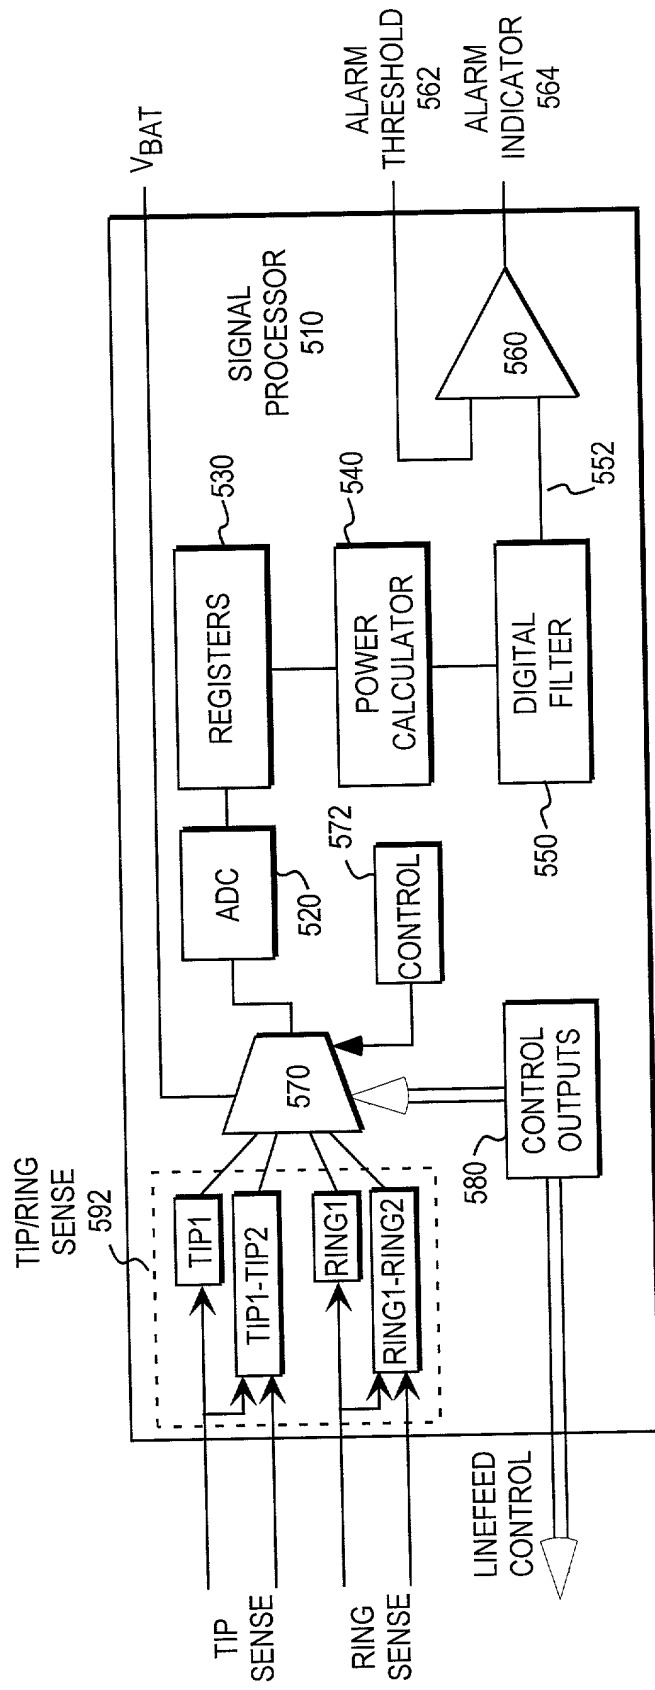


FIG. 5

09441330 111659

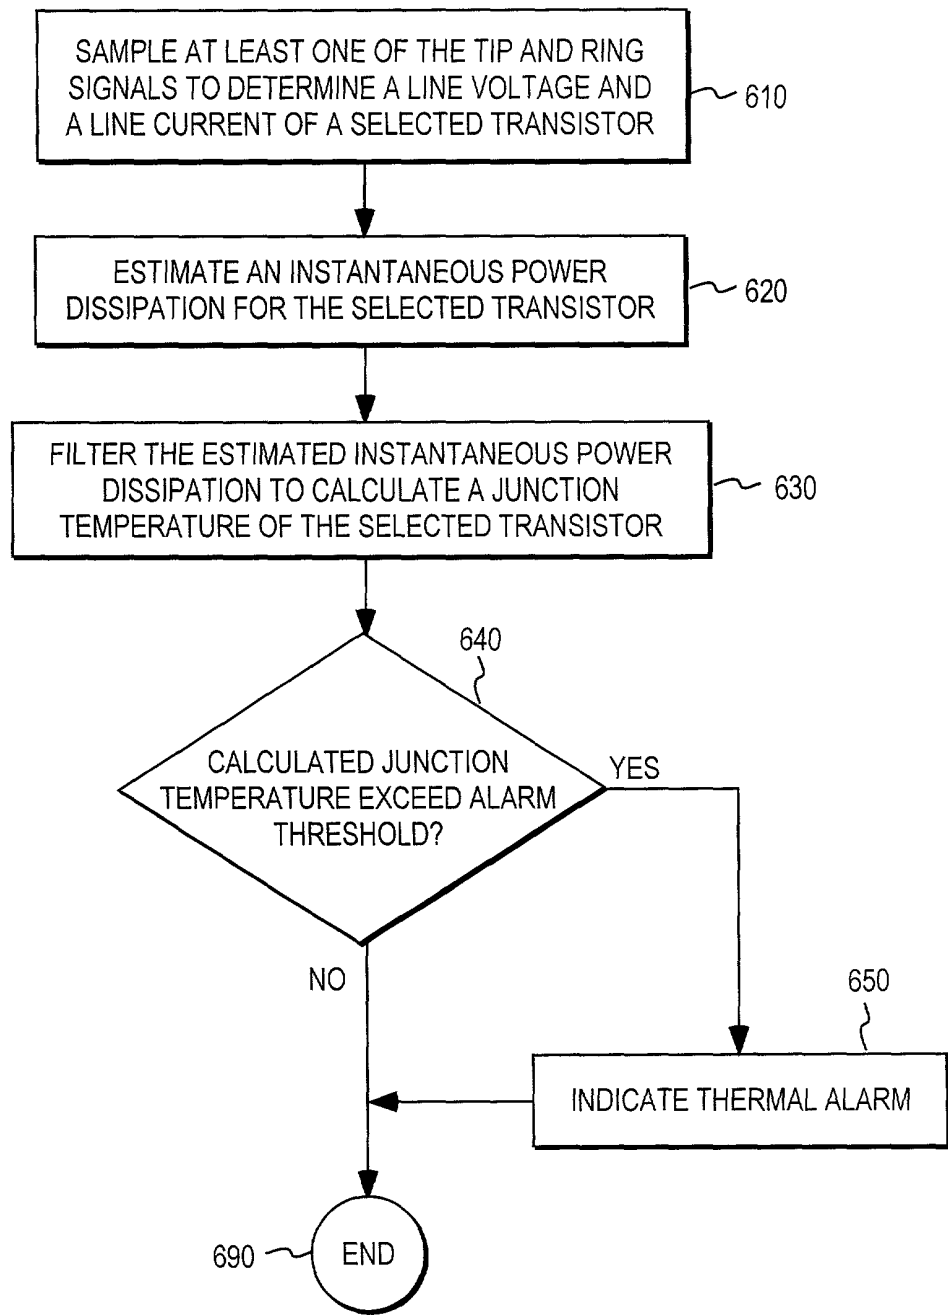


FIG. 6

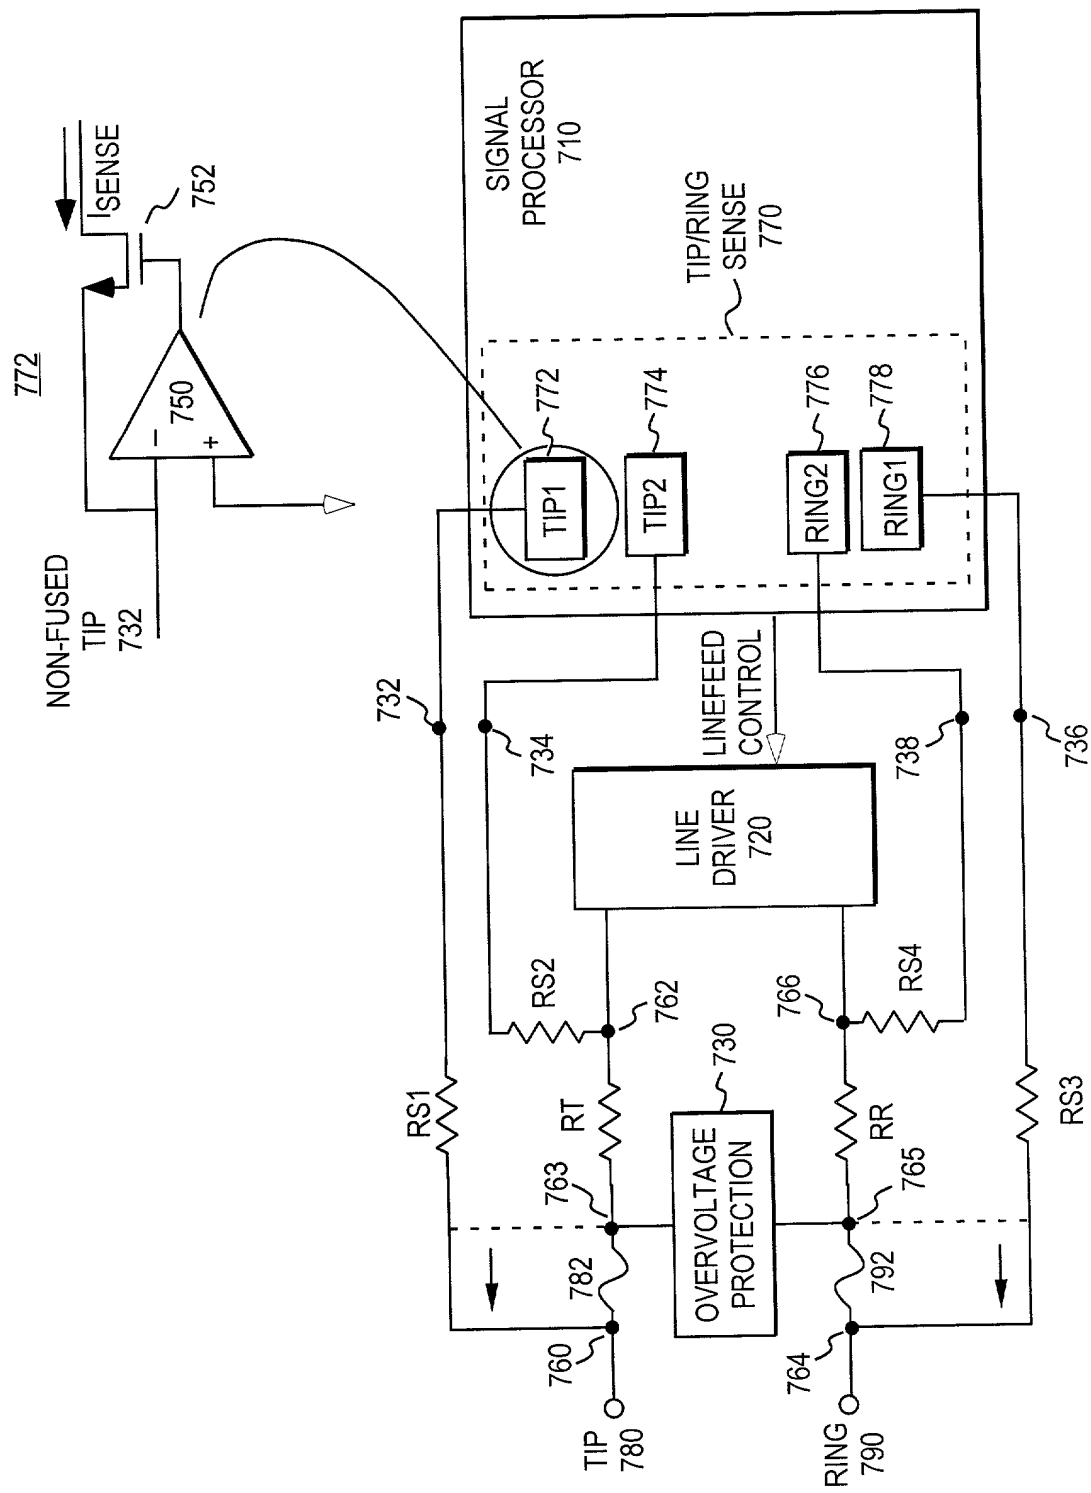


FIG. 7

DECLARATION/POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**METHOD AND APPARATUS FOR MONITORING
SUBSCRIBER LOOP INTERFACE CIRCUITRY POWER DISSIPATION**

the specification of which

 X is attached hereto.
 was filed on _____ as
United States Application Number _____
or PCT International Application Number _____
and was amended on _____.
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Country	Application No.	Date Filed	35 U.S.C. §119 Priority Claimed

Provisional Application Claim of Priority

I hereby claim the benefit under title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below:

Application No.	Filing Date

U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I

acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Application No.	Filing Date	Status

Power of Attorney

I hereby appoint the following attorney(s) and/or agent(s) with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:

William D. Davis, Reg. No. 38,428; and Bruce A. Johnson, Reg. No. 37,361 of
Davis & Johnson, L.L.P., P.O. Box 1093, 4503 W. Hwy 290, Dripping Springs, Texas 78620 Telephone: (512) 858-1218

Correspondence Address

Send Correspondence To:

William D. Davis
Davis & Johnson, L.L.P.
P.O. Box 1093
4503 W. Hwy 290
Dripping Springs, TX 78620

Direct Telephone Calls to:


William D. Davis
(512) 858-1218

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First Inventor: Jerrell P. Hein
Residence Address: 19507 FM 150 West, Driftwood, Texas 78619
Post Office Address: same

Citizenship: USA

Inventor's Signature

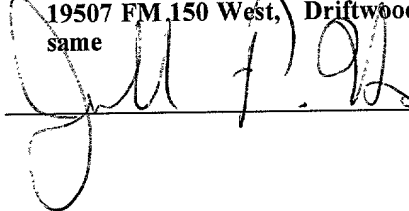

Date

11/10/99